



LitePipe

Advantages

- ▶ Activated by motion sensor
- ▶ Can be individually cut to size

Features

- ▶ Load capacity of up to 40 kg/m
- ▶ Can be retrofitted into furniture

Examples of use

- ▶ Wardrobes
- ▶ Cloakrooms

LitePipe

	WarmWhite	NeutralWhite
1000 mm (max. 5.0 W)	55 152 11	55 152 08
1200 mm (max. 5.5 W)	55 146 11	55 146 08

Accessories*

LED ballast 6 W with flat Euro plug	30 226 02
LED ballast 20 W with flat Euro plug	31 016 01
M1 extension lead 1800 mm	36 768 01
M1 3-way distributor 180 mm	36 852 01
M1 6-way distributor 2000 mm	36 125 01


* Further accessories in section Switch systems/Ballasts and leads

Technical details



Luminaire type: Wardrobe rail LED light
 Functional lighting
 Type of lighting: Functional lighting
 Surface finish: Aluminium
 Operating voltage: 12 V DC
 Light colour: WarmWhite/ NeutralWhite
 Colour rendering: RA >80
 Luminous flux: 220 lm/m
 Luminaire efficiency: 44 lm/W
 Light source: 80 lm/W
 Life span: 30,000 h (L70)
 Power consumption: max. 5.5 W
 Dimmable: No
 Beam angle: 90°
 Half value angle: 60°
 Test marks and symbols: CE
 Protection rating: IP 20
 Supply lead: 2000 mm
 Motion sensor
 Detection angle: 60°
 Reach: 2 m
 Stay-'ON' time: 40 seconds
 Plug connector: LED mini
 M1 plug connector
 LED ballast
 Connection to: LED ballast

Light distribution diagram 60°

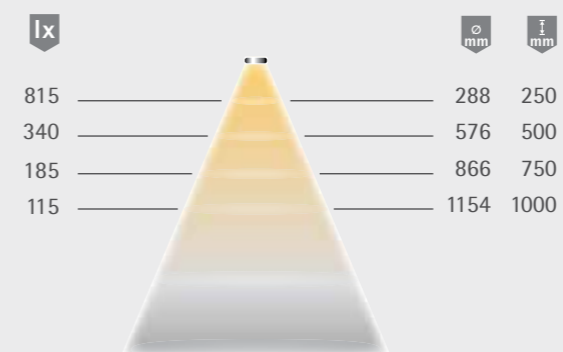

Dimensional drawing / installation

Can be individually cut to size

